




**VIVAX**  
**METROTECH**

# Type-B Skid

Technical Specifications V1.2

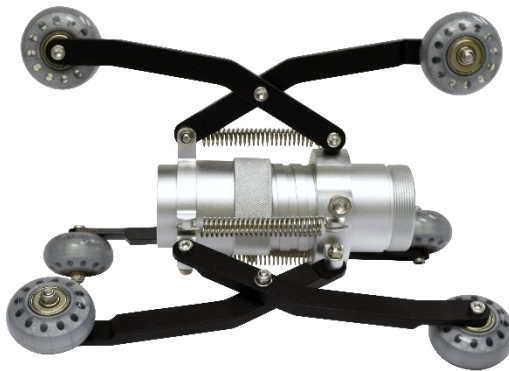

**Type-B Skid**



**Light Kit**

## Worldwide Locations

### World Headquarters, United States of America

**Vivax-Metrotech Corporation**

3251 Olcott Street, Santa Clara, CA 95054, USA

T/Free : 800-638-7682

Tel : +1-408-962-9990

Fax : +1-408-734-1799

Website : [www.vivax-metrotech.com](http://www.vivax-metrotech.com)

Email : [SalesUSA@vxmt.com](mailto:SalesUSA@vxmt.com)

### Central/South America and the Caribbean

**Ventas para América Latina**

3251 Olcott Street, Santa Clara, CA 95054, USA

T/Free : 800-624-6210

Tel : +1-408-734-1400

Tel : +1-408-734-1400

Website : [www.vivax-metrotech.com](http://www.vivax-metrotech.com)

Email : [LatinSales@vxmt.com](mailto:LatinSales@vxmt.com)

### Canada

**Vivax Canada, Inc.**

41 Courtland Ave Unit 8, Vaughan, ON L4K 3T3, Canada

Tel : +1-289-846-3010

Fax : +1-905-752-0214

Website : [www.vivax-metrotech.com](http://www.vivax-metrotech.com)

Email : [SalesCA@vxmt.com](mailto:SalesCA@vxmt.com)

### United Kingdom

**Vivax-Metrotech Ltd.**

Unit 1, B/C Polden Business Centre, Bristol Road, Bridgwater, Somerset, TA6 4AW, UK

Tel : +44(0)1793 822679

Website : [www.vivax-metrotech.com](http://www.vivax-metrotech.com)

Email : [SalesUK@vxmt.com](mailto:SalesUK@vxmt.com)

### France

**Vivax-Metrotech SAS**

Technoparc - 1 allée du Moulin Berger, 69130 Ecully, France

Tel : +33(0)4 72 53 03 03

Fax : +33(0)4 72 53 03 13

Website : [www.vivax-metrotech.fr](http://www.vivax-metrotech.fr)

Email : [SalesFR@vxmt.com](mailto:SalesFR@vxmt.com)

### Germany

**Metrotech Vertriebs GmbH**

Am steinernen Kreuz 10a  
D-96110 Schesslitz

Tel : +49 954 277 227 43

Website : [www.vivax-metrotech.de](http://www.vivax-metrotech.de)

Email : [SalesEU@vxmt.com](mailto:SalesEU@vxmt.com)

## Type-B Skid

### A. Typical Applications

Item	Parameter
Description	Adjustable Centering Skid for the D34 and D46 Series Cameras (When used with 12mm pushrod reels)

### B. Characteristics

Item	Parameter
Construction	<ul style="list-style-type: none"> <li>Base: Aluminum</li> <li>Arms: Anodized aluminum</li> <li>Wheels: Polyurethane</li> <li>Hardware: Stainless steel</li> </ul>
Weight	2.65lbs (1.2kg)
Dimensions	<ul style="list-style-type: none"> <li>Contracted: 6.9" (175mm) x 10-3/4" (273mm)</li> <li>Fully Expanded: 13.42" (340mm) X 9-3/4" (247.6mm)</li> </ul>
Target Line Size	8 to 15 inches / 20 to 38cm

### C. Operational

Item	Parameter
Operating Dimensions	<ul style="list-style-type: none"> <li>Skid minimum diameter: 8"/20.3cm</li> <li>Skid minimum length: 11"/27.9cm</li> <li>Skid maximum diameter: 12"/30.4cm</li> <li>Skid maximum length: 10"/25.4cm</li> </ul>

## Type-B Light Kit

### D. Typical Applications

Item	Parameter
Description	To provide additional lighting when used with the Type-B Skid
Materials	<ul style="list-style-type: none"> <li>Base: Polyoxymethylene</li> <li>Window: Polycarbonate</li> </ul>

### E. Characteristics

Item	Parameter
Power Source	3 X Alkaline AA Batteries
Battery Life	2 Hours
Sealing Rating	IP68
Luminous Intensity	6000 MCD

---

Weight	1lb (0.42kg)
--------	--------------

---

All products are designed and manufactured under ISO 9001:2015.

**Disclaimer:** All product availability or product accessory information is subject to change without notice.